


esPatio

TECHNICAL FEATURES

BOW LOUNGE

By Yonoh Studio

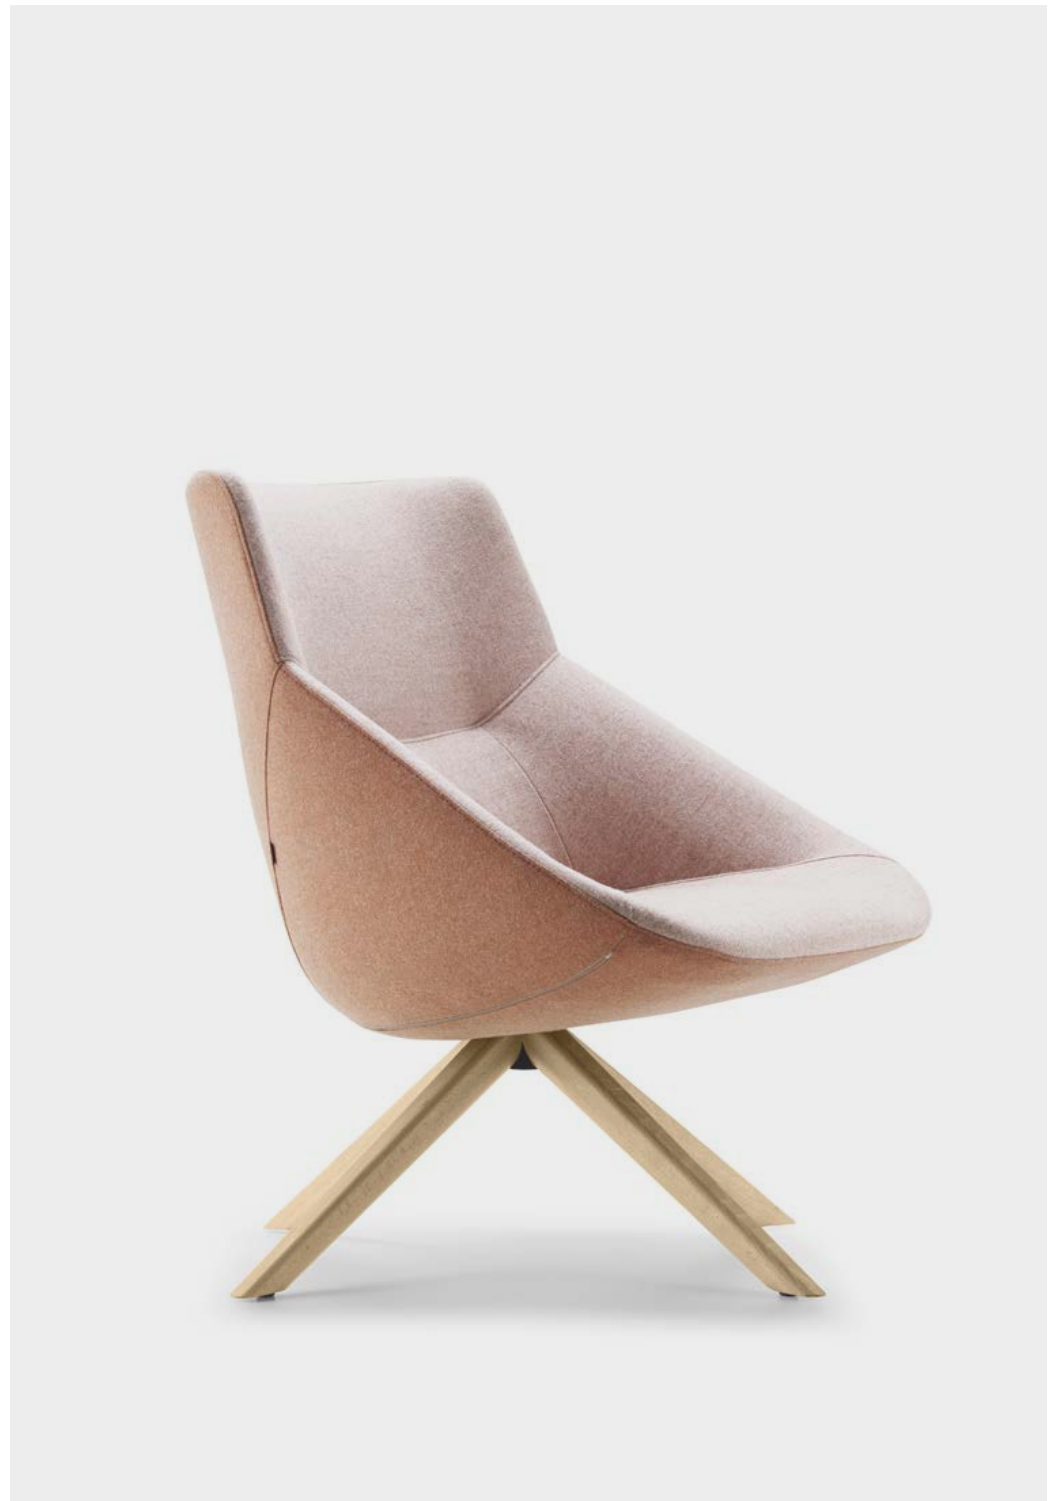

Armchairs



Shell

Both high and low backrest (two seat sofa is always with low backrest) versions have a strong metal frame made from 0.4" inch diameter cold rolled steel rods and steel support plates. This frame is then wrapped and injected with high density foam 4.4 lbs/ft³. This base is then upholstered at various thickness, with at least a depth of 4.9" inches at the seat area.

Optional structures

- **4 wooden legs:** fixed structure with 4 legs made of varnished or lacquered beech wood. Each leg tappers from 1.6" inches to 1.2" inch at the foot. Bolt-on glides manufactured in black polyethylene with grey anti-slip are then added.
- **4 conical metal legs:** fixed structure with 4 legs made of threaded steel. Diameter of 0.7" inch in the lower part and 1.2" inches in the upper part of each leg. Black glides in low density polythene (PELD) are added.
- **Pyramidal wooden base:** crew-in swivel structure made of steel and covered with a varnished beech wooden case of 34.5" x 34.5" x h:12.5" inches. Plus polypropylene levelers.
- **Polished aluminium soft base:** swivel structure with 4 spokes made of injected aluminum with conical shape of ø 32.5" x h: 12." inches. Plus polyurethane glides.
- **Wooden legs for two seat sofa:** fixed structure with 4 legs made of natural beech wood that can be lacquered. The legs taper from 1.6" inches diameter to 1.2" inch diameter at the foot. The rear legs are made of steel and covered with a beech wood sheath. Black polyethylene glides are then fitted with a grey non slip attachment.
- **Forged structure:** structure with 4 steel legs made of 0.8" x 0.3" inch solid calibrated bar. Molded by traditional forging process with forge, riveted and welded to provide greater structural strength. Painted with epoxy paint and 100 micron micro-textured finish in Matte Black. Round ends finished in black 0.2" inch high.

Packaging

The armchairs is delivered packed in an individual box that protects it during transport. The cardboard used in this box is 100% recyclable.

Certificate

Our products are designed, manufactured and distributed according to current regulations and organizational standards.

▶ [Information](#)

5-year warranty

▶ [Warranty terms and conditions](#)

Maintenance and cleaning of products

esPattio provides recommendations to the user so that their products always look new and in excellent condition.

As a general rule, we recommend the use of environmentally friendly cleaning agents. Please follow the cleaning product manufacturer's instructions.

▶ [Information](#)

Dimensions

in

Low backrest

High backrest

Two seat sofa



These dimensions are similar for the whole product, regardless of the chosen base.

Legs/Base	Low backrest			High backrest			Two seat sofa		
	lbs	ft³	□	lbs	ft³	□	lbs	ft³	□
4 wooden legs	50-41 lbs	26.6 ft³	1	53-43 lbs	26.6 ft³	1	86-75	27.5 ft³	1
4 conical metal legs	52-42 lbs	26.6 ft³	1	53-43 lbs	26.6 ft³	1	84-73	27.5 ft³	1
Aluminium Soft base	58-48 lbs	26.6 ft³	1	62-50 lbs	26.6 ft³	1			
Pyramidal wooden base	63-53 lbs	26.6 ft³	1	67-57 lbs	26.6 ft³	1			
Forged structure	62-54 lbs	26.6 ft³	1	63-54 lbs	26.6 ft³	1			
Linear meters	2.6 yd			2.6 yd			4.4 yd		

Life cycle analysis



SBWG2

Raw Materials	lbs	%
Steel	27	68
Upholsteries / Filling materials	13	32
Plastics	0.02	1

% Recycled Mat.= 5%
% Recyclable Mat.= 12%

Ecodesign

Results reached during the life cycle stages

Materials

- Steel: 15%-99% recycled material.
- Wood: 70% of the wood material is recycled, has PEFC/FSC and complies within the E1 standard.
- Plastic: 30%-40% recycled material.
- Powder painting without COV emissions.
- Staff material without HCFC and certified by Okotext.
- Upholsteries without COV emissions and certified by Okotext.
- Packings: 100% recyclable with inks with no solvents.

Production

- Raw materials use optimization. Board, upholstery and steel tubes cut.
- Renewable energies use, reducing the CO2 emissions (Photovoltaic pannels).
- Energy saving measures in all production process.
- COV global emission reduction of the production processes by 70%.
- Powder painting recovery of 93% of the non deposited painting.
- Glue removal from the upholstery.
- The facilities have an internal sewage for liquid waste.
- Green points at the factory.
- 100% waste recycling at production process ans dangerous waste special treatment.

Transporte

- Cardboard use opmitization of the packings.
- Cardboard and packing materials use reduction.
- Flat packings and small bulks to optimize the space.
- Solid waste compacter which reduces transport and emissions.
- Light volumes and weights.
- Transport fleet renewal reducing by 28% the fuel consumption.
- Suppliers area reduction. Local market power and less pollution at transport.

Use

- Easy maintenance and cleaning without solvents.
- esPattio guarantee.
- The highest quality for materials to provide a 10 year average life of the product.
- Useful life optimization of the product due to a standarized and modular design.
- The boards with no E1 particle emission.

End life

- Easy unpacking for the recyclability or compound reuse.
- Piece standarization for the use.
- Recycled materials used for products (% recyclability):
- Aluminium is 100% recyclable. Steel is 100% recyclable. Wood is 100% recyclable. Plastics are from 70 to 100% recyclable.
- With no air or water pollution while removing waste.
- Returnable, recyclable and reusable packing.

Maintenance and cleaning guide

Lines for a correct cleaning and maintenance considering the different materials:

Fabrics

- ① Vacuum often.
- ② Rub the dirty spot with a wet cloth with PH neutral soap.
Test first on a hidden spot.
- ③ Dry foam for carpets can be alternatively used.

Wooden - melamine pieces

- ① Rub the dirty spot with a wet cloth with PH neutral soap.
Test first on a hidden spot.
- ② Do not use abrasive products under any circumstances.

Metal pieces

- ① Rub the dirty spot with a wet cloth with PH neutral soap.
Test first on a hidden spot.
- ② Polished aluminum parts can be restored with polish on a dry cotton cloth to restore their initial gloss conditions.

Plastic pieces

- ① Rub the dirty spot with a wet cloth with PH neutral soap.
Test first on a hidden spot.
- ② Do not use abrasive products under any circumstances.